



Raising the standard through innovation

## Bucket-Guzzler<sup>®</sup> Hand Pump GB-0400D



- **Durable, lightweight Guzzler hand pump**
  - 8.0GPM (at 72 cpm)
  - Rugged aluminum handle
  - Buna-N or Viton diaphragm and valves
  - Clamp ring adjusts to 12 different orientations
  - Optional aluminum clamp ring for added durability
- **5 gallon pail & lid options**
  - 0.70 mil plastic High Density Polyethylene (HDPE)\*\*
  - 26-gauge steel with lever-locking lid
- **Multiple hose options**
  - 1-in hose slips easily over standard pump inlet (available in 4ft, 6ft, 10ft lengths)
  - Optional male garden hose pump inlet accommodates standard garden hose
  - Optional all-weather, fuel transfer hose with quick connect/disconnect Camlock to pump
  - Optional 1/4-in ID hose for pumping from small openings
- **Multiple 1-in hose end options**
  - Strainer to prevent pump blockages
  - Check valve for pumping up large distances
    - keeps water from draining out of hose when pumping ends

- **Collect spills the easy way!**
- **Bosworth Guzzler hand pump empties directly into 5 gallon pail**
- **Available with 4', 6' or 10' of 1-in ID hose**
- **Strainer/Check Valve at hose end**
  - *Keeps debris out of pump to prevent clogging*
  - *Keeps fluid in hose when pumping ends*
- **Ideal for collecting small contained spills\***
  - *Service station spill buckets & catch basins*
  - *Oily marine bilge*



Hose stores neatly inside bucket when not in use.



Available with optional steel pail with lever-locking lid

### Pump Performance

<b>Flow Rate</b>	Per minute <sup>1</sup> : 6.5 Gal (24.6L) Per stroke: 0.44 Qt (0.42L)
<b>Max Lift</b>	12 ft (3.7 m) 22 ft (6.7 m) with check valve
<b>Max Service Temp</b>	212°F (100°C)

<sup>1</sup>: at 60 cycles per minute

### Valve Options



**Flapper** — General purpose liquid transfer.



**Duckbill** — For dirty liquid and sewage. Permits mounting in any position.


### Additional Optional Clamp Rings



Epoxy-coated Aluminum for reinforcement against vigorous pumping



Epoxy-coated Aluminum with Stop Brackets to prevent over-stroking

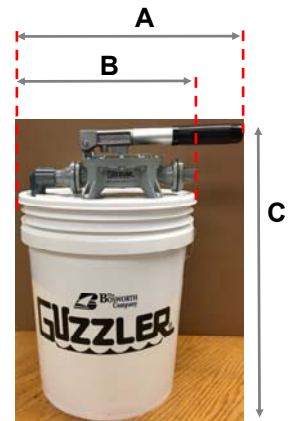

	in	cm
<b>A</b>	15	38.0
<b>B</b>	12	30.4
<b>C</b>	19	48.2
<b>Weight</b>	HPDE Pail	Steel Pail
w/4 ft hose	4.8 lb / 2.2 kg	6.2 lb / 2.8 kg
w/6 ft hose	5.2 lb / 2.4 kg	6.6 lb / 3.0 kg
w/10 ft hose	5.8 lb / 2.6 kg	7.2 lb / 3.3 kg

### Specifications / Options

<b>Pump Body &amp; Ports*</b>	Acetal (POM) Copolymer / Gray
<b>Pump Handle</b>	Aluminum: Horizontal/Silver, Horizontal/Black, Vertical (Removable)/Silver
<b>Pump Valves *</b>	Flapper (Buna N, Neoprene, Viton), Duckbill (Buna-N)
<b>Pump Diaphragm*</b>	Buna-N, Neoprene, Viton
<b>Pail &amp; Lid*</b>	High Density Polyethylene (HDPE), 26-gauge Steel
<b>Hose*</b>	1-in ID PVC Vinyl, wire reinforced; temp range -10°F to 160°F; all-weather fuel-transfer hose with Camlock connection to pump

\* In contact with fluid

\*\* Not suitable for long-term storage of fuels or oils

930 Waterman Avenue  
East Providence, RI 02914  
(401) 438-1110 • fax (401) 438-2713  
toll-free (888) 438-1110 • www.thebosworthco.com

Guzzler®, Sea-lect® and SapCheck® are registered trademarks of The Bosworth Company



# Guzzler® Hand Pump GB-0400D



**Example: GB-0400D-111-02-04-050**

- Guzzler Hand Pump mounted to Pail
- Model style #0400D: Acetal Body, Opposite Side Ports
- Horizontal Handle (Silver)
- Buna-N Flapper Valves
- Buna Diaphragm
- Acetal Plastic Clamp Ring
- Strainer/Check Valve (Flapper)
- 4 ft of 1-in PVC Hose
- 5 Gallon Pail
- Pail material: HDPE (High Density Polyethylene)

Guzzler Product	
Option	Code
Hand Pump Mounted to Pail	GB

Pump Style (Family)	
Option	Code
Acetal, Opp. Side Ports	0400D

Handle	
Option	Code
Horizontal/Silver	1
Vertical/Silver (Removable)	4

Valves	
Option	Code
Flapper (Buna-N)	1
Flapper (Viton)	4
Duckbill (Buna-N)	6

Diaphragm	
Option	Code
Buna Nitrile	1
Buna-N 3-Ply	2
Viton	4

**GB - 0400D - 1 1 1 - 0 2 - 04 - 05 0**

Clamp Ring	
Option	Code
Acetal Plastic	0
Epoxy-coated Alum	1
Epoxy-coated Alum w/Stop Brackets	4

Hose End	
Option	Code
None	0
Strainer	1
Strainer/Check Valve (Flapper)	2
Check Valve (Flapper)	3

Hose Option*	
Option	Code
No hose; Male Garden Hose Pump Inlet	00
1/4-in id hose, 3 ft	43
1-in id hose, 4 ft	04
1-in id hose, 6 ft	06
1-in id hose, 10 ft	10
1-in id, all weather fuel hose with Cam-lock pump connection, 6 ft	16
1-in id, all weather fuel hose with Cam-lock pump connection, 8 ft	18

Pail Capacity	
Option*	Code
5 Gal	05

Pail Material	
Option	Code
HDPE	0
Steel	1

\* Custom hose lengths available. Contact Factory.

